




TRIPLE WALL SERIES

6, 8, & 10mm Polycarbonate Sheet

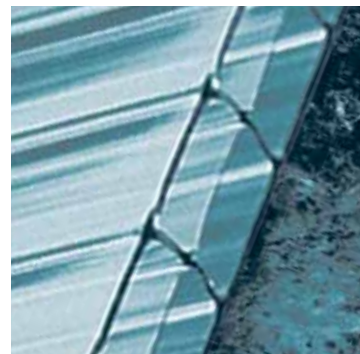

CO-EX
CORPORATION

Macrolux
MULTIWALL



CO-EX is proud to offer **Macrolux® Triple Wall** Polycarbonate Sheet. Triple wall increases the R Value over traditional twin wall polycarbonate. The material is extruded with three layers of polycarbonate to create more air pockets, thus increasing the R Value. This makes **Macrolux® Triple Wall** an ideal covering for all applications where heat saving is a concern.

It is ideal for:

- Greenhouses
- Skylights
- Windows
- Roofing, Glazing
- Do-It-Yourself Projects


MAIN CHARACTERISTICS

- Increased U-Value over traditional twin-wall
- High Light Transmission up to 75%

EASY TO INSTALL

Macrolux® Triple Wall Polycarbonate Sheet have been specifically designed for simple and rapid installation. It will not crack or split when cut or drilled.

WARRANTY – 10 year on yellowing and hail

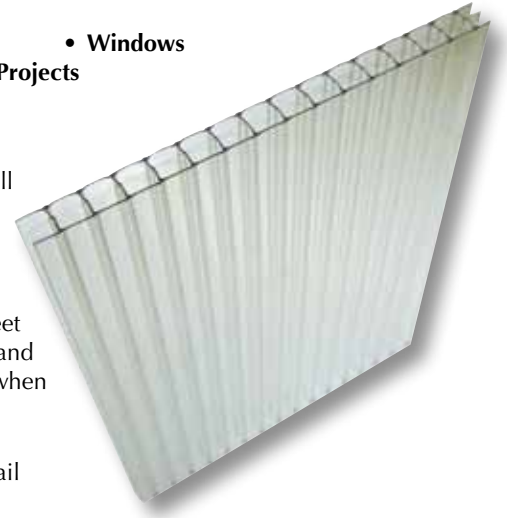

TECHNICAL DATA

SHEET THICKNESS	MM	6 mm*	8 mm	10 mm*
	INCH	1/4"	5/16"	3/8"
Wall Type		Triple	Triple	Triple
Rib Spacing		0.3125"	0.3125"	0.3125"
Standard Width		48" & 72"	48" & 72"	48" & 72"
Standard Length		Up to 39'	Up to 39'	Up to 39'
Light Transmission	Clear	75%	75%	75%
	Bronze	23%	23%	23%
	Opal	60%	60%	55%
Solar Control G-value	Clear	85%	84%	78%
	Bronze	69%	66%	63%
	Opal	63%	62%	59%
Thermal Insulation	U-Factor	.60	.528	.475
	R-Factor	1.67	1.89	2.10
Shading Coefficient	Clear	.98	.97	.90
	Bronze	.79	.76	.72
	Opal	.72	.71	.68

* Special Order Items

The data shown here is subject to change without notice at the discretion of CO-EX Corporation. It is the sole responsibility of the customer to confirm with their own architect, engineer or other professional consultants that the goods offered for sale by CO-EX Corporation meet the requirements and specifications of the particular project and use for which they are being purchased.

Call today for more information! (800) 888-5364