

 swiss made

Greenhouses and Horticulture



www.co-excorp.com

CO-EX Corporation

SUBSIDIARY OF KOSCON INDUSTRIAL S.A.

Why use polycarbonate in greenhouses?

For its many properties, namely:

Light weight / Ease of transport and installation

UV stability and weathering resistance (wind / hail / wide range of service temperatures)

Transparency and translucency

Thermal insulation and multiple wall energy savings

Long life

Excellent fire performance

Specific treatment and special finishing options (condensation-resistant, light diffusion)

Impact resistance / Mechanical resistance



NEWS

Greca

*The width
in greatest
demand for
professional
greenhouses
73.6 inches!*

NEWS

Omega

*The only
manufacturer
in the world
to produce
widths up to
79.6 inches!*




*More light
for a better life*

Macrolux® Rooflite®

Greca
width **73.6 inches (1870 mm)** 
and **50 inches (1270 mm)**

Solid corrugated polycarbonate sheet with Greca shape and UV protection on one or both sides, **from .028 inches (0.7 mm) to .043 inches (1.1 mm) thicknesses**, available with anti-condensation control (Mindew) treatment on the internal side.

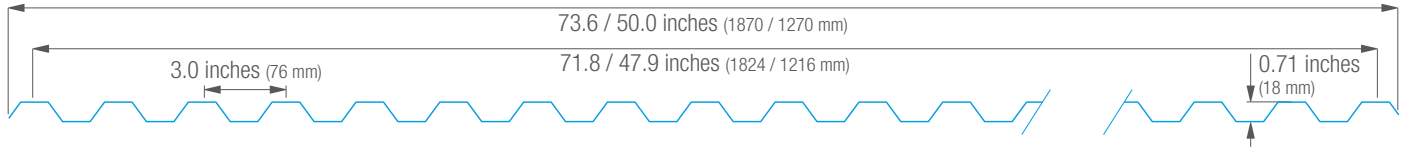


Structure	LT%	Light diffusion %	Bending radius [▪]	Warranty
Greca	Clear (0010): 89%	5%	157.5 inches (4000 mm)	10-year
	Opal (0331): 85%	100%		
	Opal (0037): 80%	98%		
	Opal (9011): 2%	100%		

[▪] Refers to average .031 inches (0.8 mm) thickness.

Macrolux® Rooflite®

Omega
width **79.6 inches (2022 mm)** 
73.6 inches (1870 mm) and
49.8 inches (1266 mm)

Solid corrugated polycarbonate sheet with Omega shape and UV protection on one or both sides, **.031 inches (0.8 mm) and .039 inches (1.0 mm) thicknesses**, available with anti-condensation control (Mindew) treatment on the internal side.

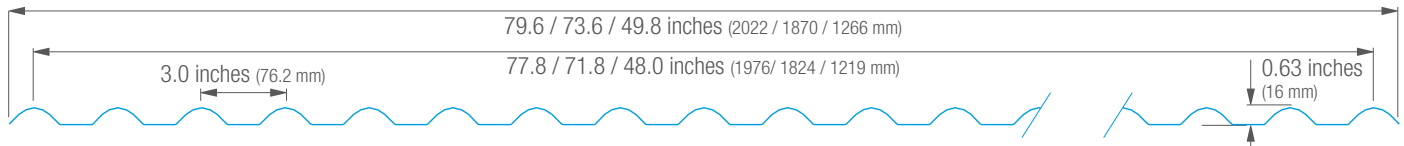

Structure	LT%	Light diffusion %	Bending radius [▪]	Warranty
Omega	Clear (0010): 89%	5%	157.5 inches (4000 mm)	10-year
	Opal (0331): 85%	100%		
	Opal (0037): 80%	98%		
	Opal (9011): 2%	100%		

[▪] Refers to average .031 inches (0.8 mm) thickness.

Fire test certifications and NEWGEN version available.

Strengths

Less overlap → greater light transmission

Greater light diffusion → uniform crop growth and reduced stress thanks to the constant inside temperature

Shorter installation times and lower installation costs

Transport costs optimized



Macrolux® Multiwall

**twin-wall
thickness
4 / 6 / 8 / 10 mm**
(.157 / .236 / .315 / .394 inches)

Twin-wall polycarbonate sheet with UV protection on one or both sides, **4 / 6 / 8 / 10 mm** (.157 / .236 / .315 / .394 inches) **thicknesses**, available with anti-condensation control (Mindew) treatment on the inside.
Closed-edge sheets available in various widths.




Structure	LT%	U-value Btu / ft ² h °F	Bending radius	Warranty
2W - 4 mm (.157 inches)	Clear (0010): 82%	0.687 $R = \frac{1}{U} = 1.456$	23.6 inches (600 mm)	-
	Opal (0037): 64%			
2W - 6 mm (.236 inches)	Clear (0010): 80%	0.616 $R = \frac{1}{U} = 1.623$	35.9 inches (900 mm)	-
	Opal (0037): 60%			
2W - 8 mm (.315 inches)	Clear (0010): 80%	0.564 $R = \frac{1}{U} = 1.773$	47.2 inches (1200 mm)	10-year
	Opal (0037): 60%			
2W - 10 mm (.394 inches)	Clear (0010): 80%	0.528 $R = \frac{1}{U} = 1.894$	59.1 inches (1500 mm)	10-year
	Opal (0037): 55%			
<i>Also available in matt white version (LT ≤ 2%).</i>		Other structures and thicknesses available on demand.		

Macrolux® Multiwall

**triple-wall
thickness 8 mm**
(.315 inches)

Triple-wall polycarbonate sheet with UV protection on one or both sides, **8 mm** (.315 inches) **thickness**, available with anti-condensation control (Mindew) treatment on inside.
Closed-edge sheets available in various widths.



Structure	LT%	U-value Btu / ft ² h °F	Bending radius	Warranty
3Q - 8 mm (.315 inches)	Clear (0010): 75%	0.528 $R = \frac{1}{U} = 1.894$	47.2 inches (1200 mm)	10-year
	Opal (0037): 60%			
<i>Also available in matt white version (LT ≤ 2%).</i>		Other structures and thicknesses available on demand.		

Fire test certifications and NEWGEN version available.

Strengths

Multiwall structure → improved thermal insulation

Multiwall structure → greater load resistance


Available in multiple widths & lengths → improved handling and ease of installation



Available treatments and options

Mindew

Anti-condensation control treatment available on one or both sides designed so that moisture settles evenly over the sheet's inside surface, without affecting light transmission (LT%), thus stopping drops forming and consequently dripping onto crops and causing damage. The film of water created is channelled into special drain profiles at the base of the roof.

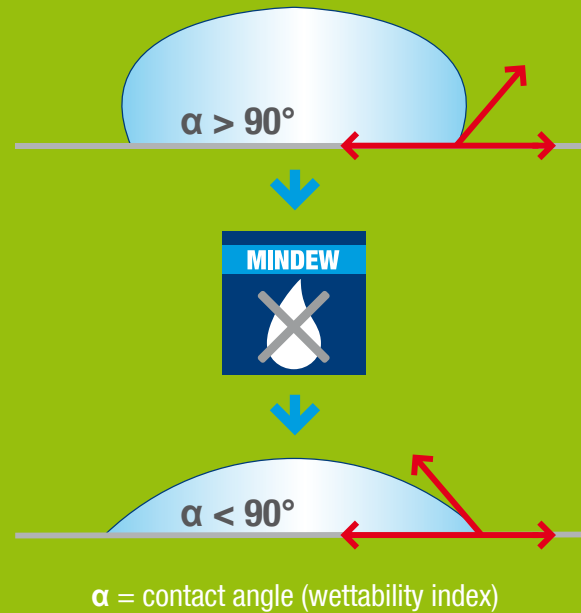

XL (2 side UV)

Option of protection from the effects of UV rays on both sides of the sheet.

NEWGEN version (15 years Warranty)

On request the product can be provided with an increased UV protection that allows a 15 years warranty.

Colors

Option of various diffusing opal colors with various degrees of light transmission (LT%) up to the matt white version with $LT \leq 2\%$.

Find out more about our full range of products and relevant certifications by contacting our Customer Service Department.

CO-EX Corporation

SUBSIDIARY OF KOSCON INDUSTRIAL S.A.



Built-in gasket

Option of UV-resistant, transparent flexible built-in gasket.

- *greater airtight and waterproof properties*
- *excellent transparency*
- *the built-in gasket helps to prevent any imperfections of overlapping during installation*



All information, advice or suggestions provided by CO-EX Corporation, such as sheet performance, application projects or use of our materials, are given in good faith, to the best of our knowledge. Nonetheless, given that CO-EX Corporation has no control over the use to which third parties put our material, we disclaim responsibility towards any purchasers, users or third parties for any service rendered or for the properties or performance of the material. Individual users of the material are required to perform their own trials to determine whether the material is suitable for the specific use in question. CO-EX Corporation reserves the right to change any kind of data featured herein at any time without prior notice.



CO-EX Corporation
5 Alexander Drive, Wallingford
CT 06492, USA
Tel. (203) 679-0500
Tel. (800) 888-5364
Fax. (203) 679-0600
info@co-excorp.com
www.co-excorp.com

CO-EX Corporation
SUBSIDIARY OF KOSCON INDUSTRIAL S.A.